

© International Baccalaureate Organization 2026

All rights reserved. No part of this product may be reproduced in any form or by any electronic or mechanical means, including information storage and retrieval systems, without the prior written permission from the IB. Additionally, the license tied with this product prohibits use of any selected files or extracts from this product. Use by third parties, including but not limited to publishers, private teachers, tutoring or study services, preparatory schools, vendors operating curriculum mapping services or teacher resource digital platforms and app developers, whether fee-covered or not, is prohibited and is a criminal offense.

More information on how to request written permission in the form of a license can be obtained from <https://ibo.org/become-an-ib-school/ib-publishing/licensing/applying-for-a-license/>.

© Organisation du Baccalauréat International 2026

Tous droits réservés. Aucune partie de ce produit ne peut être reproduite sous quelque forme ni par quelque moyen que ce soit, électronique ou mécanique, y compris des systèmes de stockage et de récupération d'informations, sans l'autorisation écrite préalable de l'IB. De plus, la licence associée à ce produit interdit toute utilisation de tout fichier ou extrait sélectionné dans ce produit. L'utilisation par des tiers, y compris, sans toutefois s'y limiter, des éditeurs, des professeurs particuliers, des services de tutorat ou d'aide aux études, des établissements de préparation à l'enseignement supérieur, des fournisseurs de services de planification des programmes d'études, des gestionnaires de plateformes pédagogiques en ligne, et des développeurs d'applications, moyennant paiement ou non, est interdite et constitue une infraction pénale.

Pour plus d'informations sur la procédure à suivre pour obtenir une autorisation écrite sous la forme d'une licence, rendez-vous à l'adresse <https://ibo.org/become-an-ib-school/ib-publishing/licensing/applying-for-a-license/>.

© Organización del Bachillerato Internacional, 2026

Todos los derechos reservados. No se podrá reproducir ninguna parte de este producto de ninguna forma ni por ningún medio electrónico o mecánico, incluidos los sistemas de almacenamiento y recuperación de información, sin la previa autorización por escrito del IB. Además, la licencia vinculada a este producto prohíbe el uso de todo archivo o fragmento seleccionado de este producto. El uso por parte de terceros —lo que incluye, a título enunciativo, editoriales, profesores particulares, servicios de apoyo académico o ayuda para el estudio, colegios preparatorios, desarrolladores de aplicaciones y entidades que presten servicios de planificación curricular u ofrezcan recursos para docentes mediante plataformas digitales—, ya sea incluido en tasas o no, está prohibido y constituye un delito.

En este enlace encontrará más información sobre cómo solicitar una autorización por escrito en forma de licencia: <https://ibo.org/become-an-ib-school/ib-publishing/licensing/applying-for-a-license/>.

Computer science

Higher level

Paper 1

30 April 2026

Zone A afternoon | **Zone B** afternoon | **Zone C** afternoon

2 hours 10 minutes

Instructions to students

- Do not open this examination paper until instructed to do so.
- Section A: answer all questions.
- Section B: answer all questions.
- The maximum mark for this examination paper is **[100 marks]**.

Section A

Answer **all** questions.

1. Identify **three** characteristics to consider when comparing different types of computers. [3]
2. Identify **two** resources that can be shared on a local area network (LAN). [2]
3. State the purpose of the queue access method `enqueue()`. [1]
4. State the purpose of the stack access method `push()`. [1]
5. Describe how colours are represented in a computer. [3]

6. A truth table with three inputs (A, B and C) and one output (X) needs to be constructed.

A combination of the three inputs A, B and C represents a binary number.

For example:

A = 0, B = 1 and C = 1 represent the binary number $011_{(2)}$.

The decimal equivalent of $011_{(2)}$ is $3_{(10)}$.


The output, X, should be 1 if either of the following occur:

- The binary number, represented by the combination of three inputs, has an even number of 1s.
- The decimal equivalent of the binary number, represented by the combination of three inputs, is even.

Otherwise, the output, X, is 0.

Construct the truth table as described. Note that zero (0) is an even number. [4]

7. Consider the following doubly linked list:

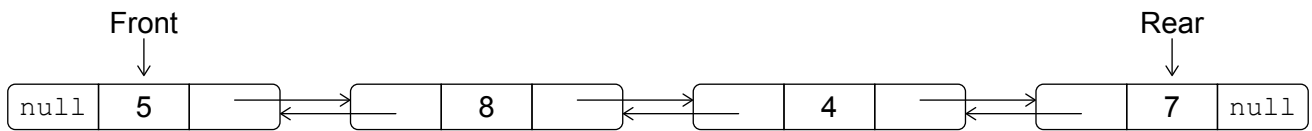

Four operations are performed on this doubly linked list in the following order:

- The first node is deleted from the doubly linked list.
- The last node is deleted from the doubly linked list.
- A new node containing the number 3 is inserted at the beginning of the doubly linked list.
- The node containing the number 8 is deleted from the doubly linked list.

Sketch the resulting doubly linked list.

[4]

8. (a) Define the term *protocol*.

[1]

(b) List **three** reasons why protocols are necessary in computer networks.

[3]

9. State the purpose of a compiler.

[1]

10. Outline what is meant by software as a service (SaaS).

[2]

Blank page

Section B

Answer **all** questions.

11. A prototype for a company's new computer system has been developed.

- (a) State **two** reasons why the company might not proceed with the new system after evaluating the prototype. [2]

After the prototype is evaluated and revised, the company decides to implement the new system, which is run in parallel with the old system.

- (b) Evaluate parallel running as part of a system installation process. [4]

The company wants to promote its services on the World Wide Web and using email to communicate with customers. To target its promotion effectively, the company has asked every customer to provide their name, email address, home address and date of birth.

- (c) (i) List **three** threats to the security of the data collected by the company. [3]
(ii) State the purpose of an email server. [1]
(iii) State **two** benefits of using email for communication among employees. [2]
(iv) Explain the need for encryption in email communication. [3]

12. (a) (i) Distinguish between primary memory and secondary memory. [3]

- (ii) Outline **two** functions of an operating system (OS) in managing primary memory. [4]

(b) A control unit (CU), an arithmetic logic unit (ALU), registers, cache memory and buses are some components of a central processing unit (CPU) that work together to execute the machine instructions.

- (i) State the role of the memory data register (MDR). [1]
(ii) Explain the use of cache memory. [3]
(iii) Explain the role of buses in CPU operations. [4]

13. (a) A taxi meter calculates fares based on distance and time.

During a trip, the taxi meter displays the fare in real time for the passengers. A preset rate for the fare is applied, and the driver inputs extra charges for luggage, trips on national holidays, or tolls.

- (i) Identify **two** input devices that could be used to collect the data needed to calculate the fare. [2]
- (ii) Describe the use of a microprocessor in a taxi meter. [3]
- (b) Taxi companies use global positioning system (GPS)-enabled taxi apps on drivers' and passengers' smartphones to measure the distance of a trip and calculate the fare.
 - (i) Explain how GPS works. [6]
 - (ii) State **two** benefits of a GPS-enabled taxi app for passengers. [2]
 - (iii) State **two** benefits of a GPS-enabled taxi app for taxi drivers. [2]

14. A program has been developed for an embedded system with limited data storage capacity.

Program execution time and memory usage should be planned precisely.

- (a) Outline **two** disadvantages of using a dynamic data structure in this program. [4]

The static integer array `ARR`, containing 10 elements, has been initialized (see **Figure 1**).

Figure 1: Example data held in the static integer array `ARR`

[0]	[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]	[9]
1	1	2	3	4	5	7	9	14	15

The following recursive sub-program has been constructed:

```
func(K, ARR)
  if K < 0
    then return 1
    else return ARR[K] * func(K-1, ARR)
  end if
end func
```

- (b) Determine the value of `func(4, ARR)`. Show all your working. [5]

The sub-program `isThere(X, ARR)` needs to be written. It accepts an integer, `X`, and the array of integers `ARR` sorted in ascending order.

An iterative binary search must be used in the sub-program to check whether `X` is contained in the array `ARR` or not.

The sub-program `isThere(X, ARR)` should return `TRUE` if `X` is contained in the array `ARR`; otherwise, it should return `FALSE`.

For example, from **Figure 1**:

- `isThere(7, ARR)` should return `TRUE`.
- `isThere(10, ARR)` should return `FALSE`.

- (c) Construct an algorithm in pseudocode for the sub-program `isThere(X, ARR)` as described. [6]

15. A music college holds a range of music events organized by its students.

There are three types of tickets for these music events, and each type has its own price (see **Figure 2**).

Figure 2: Types and prices of music event tickets

Ticket type	Description	Price
C	Child ticket	10
M	Music student ticket	12
A	Adult ticket	20

The college has a 150-seat events hall. There are 10 rows, each with 15 seats.

The static two-dimensional char array `EVENT` stores data about the types of tickets sold for one music event (see **Figure 3**).

The characters C, M and A represent the type of ticket sold for each seat.

The character F shows that a ticket has not been sold for that seat.

Figure 3: An excerpt from the two-dimensional char array `EVENT`

	[0]	[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]	[9]	[10]	[11]	[12]	[13]	[14]
[0]	A	A	A	C	M	M	A	C	A	A	A	C	A	A	A
[1]	F	F	A	A	C	C	A	A	A	M	M	F	C	C	A
[2]	A	C	C	A	A	A	A	A	M	M	M	M	A	A	F
...	...														
[9]	F	F	F	F	M	M	M	F	...				A	C	F

For example:

- `EVENT[0][0] = 'A'` shows that an adult ticket has been sold for the first seat in the first row of the concert hall.
- `EVENT[9][14] = 'F'` shows that no ticket has been sold for the last seat in the last row of the concert hall.

- (a) Outline **two** features of static two-dimensional arrays that make the array `EVENT` suitable for storing this data.

[4]

(This question continues on the following page)

(Question 15 continued)

A program that analyses the ticket sales data has many sub-programs.

The sub-program `empty(EVENT, R)` accepts the two-dimensional array `EVENT` and an integer, `R`, which represents the row index value. The sub-program outputs the number of seats in that row for which tickets are not sold.

For example, from **Figure 3**:

- `empty(EVENT, 0)` outputs 0.
- `empty(EVENT, 1)` outputs 3.

- (b) Construct an algorithm in pseudocode for the sub-program `empty(EVENT, R)` as described. [4]

The sub-program `total(EVENT)` accepts the static two-dimensional array `EVENT` and outputs the total amount of money from the sale of tickets for an event.

- (c) Construct an algorithm in pseudocode for the sub-program `total(EVENT)` as described. [7]
-

Disclaimer:

Content used in IB assessments is often taken from authentic, third-party sources. The views expressed within them belong to their individual authors and/or publishers and do not necessarily reflect the views of the IB. Sometimes fictitious companies, products or individuals are included in assessments; any similarities with actual entities are purely coincidental. Any trademarks™ or registered® trademarks included are used for illustrative purposes only, and use does not imply any affiliation with or endorsement by the International Baccalaureate.