



# Cambridge IGCSE<sup>™</sup>

CANDIDATE NAME					
CENTRE NUMBER			CANDIDATE NUMBER		

**PHYSICS** 0625/63

Paper 6 Alternative to Practical

October/November 2024

1 hour

You must answer on the question paper.

No additional materials are needed.

#### **INSTRUCTIONS**

- Answer all questions.
- Use a black or dark blue pen. You may use an HB pencil for any diagrams or graphs.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Write your answer to each question in the space provided.
- Do not use an erasable pen or correction fluid.
- Do not write on any bar codes.
- You may use a calculator.
- You should show all your working and use appropriate units.

### **INFORMATION**

- The total mark for this paper is 40.
- The number of marks for each question or part question is shown in brackets [ ].


This document has 16 pages. Any blank pages are indicated.

DC (DE/FC) 338605/3 © UCLES 2024

[Turn over


1 A student investigates the cooling of water in different sized beakers.

He uses the apparatus shown in Fig. 1.1. Beaker A and beaker B have graduations as shown in Fig. 1.1.

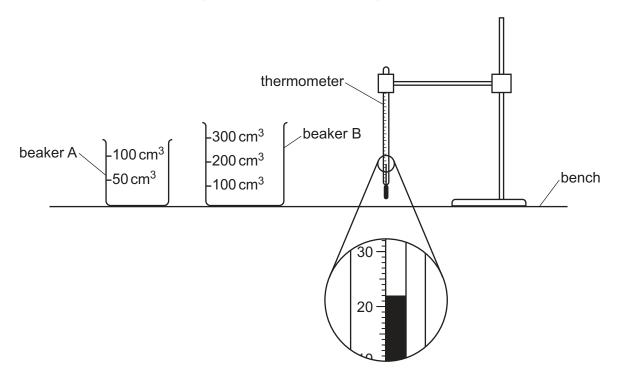

2

Fig. 1.1



$$\theta_{R}$$
 = .....°C [1]

(ii) Describe **one** technique to use so that the temperature reading is as accurate as possible in this experiment.

F.A.



**(b)** The student pours an estimated volume of 75 cm<sup>3</sup> of hot water into beaker A. He uses the scale on the beaker as a guide.

3

He puts the thermometer into the water in beaker A and records, in Table 1.1, the temperature  $\theta$  at time t = 0.

He records, in Table 1.1, the temperature of the water in beaker A every 30 s.

The student repeats the procedure for beaker B.

His readings are shown in Table 1.1.

	T41
Suggest <b>one</b> possible source of inaccuracy in	the procedure, even if it is carried out carefully.

Table 1.1

	beaker A	beaker B
t/s	θ/°C	θ/°C
0	82.5	80.0
30	80.0	75.0
60	78.0	72.0
90	76.5	69.5
120	75.0	67.0
150	74.0	65.0
180	73.0	63.5

(c)	Write a conclusion describing the effect of changing the size of the beaker on the rate of cooling of the hot water.  Justify your answer by reference to values from the results.
	[2]



(d) Students in other schools do the same experiment using identical apparatus.

the readings in Table 1.1.

State one variable that they need to control in order to obtain readings as close as possible to

**(e)** Calculate the average cooling rate *x* for beaker B. Use the readings **for beaker B** in Table 1.1 and the equation

$$x = \frac{\theta_0 - \theta_{180}}{T}$$

where  $T = 180\,\mathrm{s}$  and  $\theta_0$  and  $\theta_{180}$  are the temperatures of the water in beaker B at t = 0 and  $t = 180\,\mathrm{s}$ .

Include the unit for the cooling rate.

(f) (i) Another student thinks that more thermal energy is lost from the surface of the water in beaker B than from the sides of beaker B.

Suggest an additional experiment that she can do with beaker B to test her idea.

	[1]

(ii) Suggest how the cooling rate of the water in beaker B in this additional experiment compares with the value of x in (e) if her idea is correct.



.....[2]

[Total: 11]



## **BLANK PAGE**





2 A student determines the resistance of a resistor.

She uses the apparatus shown in Fig. 2.1.

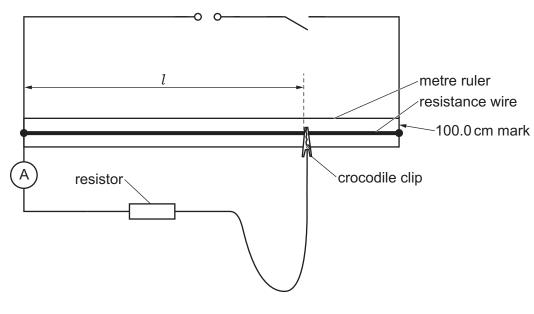


Fig. 2.1

- (a) On Fig. 2.1, draw a voltmeter connected to measure the potential difference (p.d.) across the resistor. [1]
- (b) The student connects the crocodile clip to the resistance wire at the 100.0 cm mark on the metre ruler and measures the potential difference  $V_0$  across the resistor. The voltmeter is shown in Fig. 2.2.




Fig. 2.2

Read and record the value of  $V_0$  shown on the voltmeter in Fig. 2.2.

$$V_0 = .....V$$
 [1]

(c) The student moves the crocodile clip to a length of resistance wire  $l = 20.0 \, \text{cm}$ .

Read and record in Table 2.1, the current for  $l = 20.0 \,\mathrm{cm}$ , shown on the ammeter in Fig. 2.3. [1]




Fig. 2.3


(d) The student measures the current I for lengths of resistance wire l = 30.0 cm, l = 40.0 cm, l = 50.0 cm and l = 60.0 cm. Her readings are shown in Table 2.1.

Table 2.1

l/cm	I/A
20.0	
30.0	0.22
40.0	0.30
50.0	0.39
60.0	0.42

Plot a graph of l/cm (y-axis) against I/A (x-axis).

Draw a best-fit straight line. You do **not** need to start the axes at the origin (0,0).

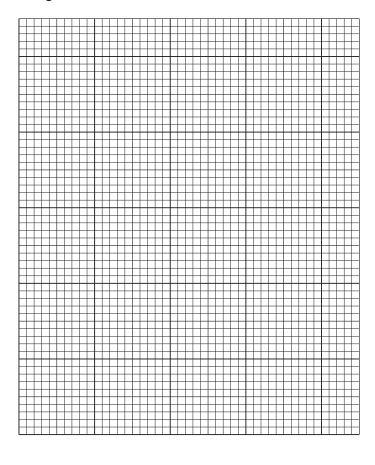

[4]

(e) (i) Determine the gradient *G* of the graph. Show clearly on the graph how you obtained the necessary information.

(ii) Calculate the resistance R of the resistor. Use your value of  $V_0$  from (b) and the equation:

$$R = \frac{G \times V_0}{100k} \text{ where } k = 1.0 \text{ A}$$

$$R = \dots \Omega$$
 [1]

-	000800000009 *	

(f)	Suggest <b>one</b> practical reason why other students might not obtain the same result as t student, even if they do the experiment carefully.	his
		[1]
(g)	The resistance wire can become very hot during this type of experiment. Suggest <b>one</b> change to the apparatus that prevents this.	
		[1]

[Total: 11]

A student investigates the refraction of light by a transparent block.

He determines a quantity known as the refractive index of the material of the block.

10

The student's ray-trace sheet is shown full-size in Fig. 3.1.

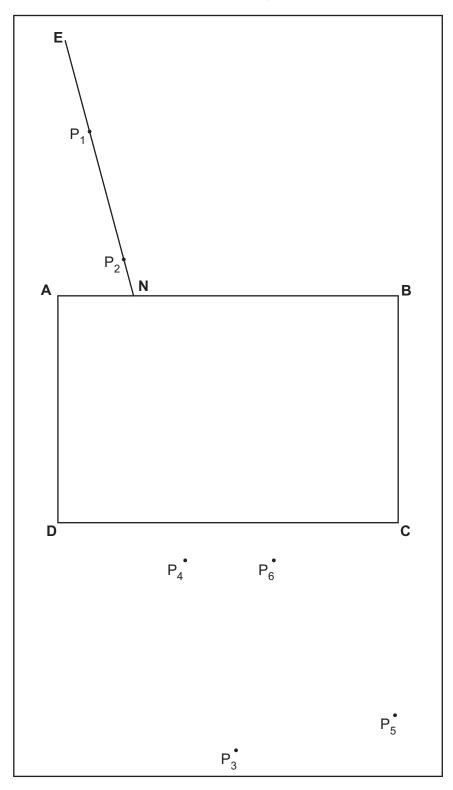


Fig. 3.1



(a) The student places a transparent block ABCD near the centre of the ray-trace sheet as indicated in Fig. 3.1.

11

(i) Draw a normal to point **N**, extending above **AB**. Label the upper end of the normal with the letter **L**.

Extend the normal downwards until it crosses line **CD**. Label the point at which it crosses **CD** with the letter **F**.

[1]

(ii) The student draws line **EN** as shown in Fig. 3.1. On Fig. 3.1, measure the acute angle  $\theta_1$  between the lines **LN** and **EN**. (An acute angle is always less than 90°.)

 $\theta_1$  = ......[1]

- (b) The student places two pins  $P_1$  and  $P_2$  on line **EN** as shown in Fig. 3.1.
  - (i) Measure distance d between pins P<sub>1</sub> and P<sub>2</sub>.

(ii) Suggest whether the two pins are a suitable distance apart for accurate ray tracing. Explain your answer.

statement .....

[1]

(c) The student views the images of P<sub>1</sub> and P<sub>2</sub> through the block. He places two pins P<sub>3</sub> and P<sub>4</sub> so that pins P<sub>3</sub> and P<sub>4</sub> and the images of P<sub>1</sub> and P<sub>2</sub> all appear exactly one behind the other.

Draw a straight line through  $P_3$  and  $P_4$ . Extend this line to cross **NF**.

Label the point at which this line meets **NF** with the letter **G**. Label the point at which this line crosses **CD** with the letter **H**.

Join points **H** and **N** with a straight line.

[1]



(d) (i) Measure the length a of line HN.

а	=	C	m

Measure the length b of line **HG**.

(ii) Calculate a value *n* for the refractive index, using the equation  $n = \frac{a}{b}$ .

12

(e) The student repeats the above procedure for an angle  $\theta_2$  = 40°. He places two pins P<sub>5</sub> and P<sub>6</sub> so that pins P<sub>5</sub> and P<sub>6</sub> and the images of P<sub>1</sub> and P<sub>2</sub> all appear exactly one behind the other.

Draw a line through pins P<sub>5</sub> and P<sub>6</sub>. Extend the line until it meets **GH**.

Label the point at which this line meets **GH** with the letter **K**. Label the point at which this line crosses **CD** with the letter **R**.

i) Measure the angle  $\alpha$ , where  $\alpha$  is the acute angle between lines **RK** and **GH**.

$$\alpha$$
 = ......[1]

(ii) Another student suggests that angle  $\alpha$  should be equal to the difference between angle  $\theta_2$  from (e)(i) and angle  $\theta_1$  from (a)(ii). State whether your results support this suggestion. Justify your answer by reference to values from your results.

statement .	 	 	 
justification	 	 	 

.....[2]

(f) Suggest one technique to use in this type of experiment to ensure results are accurate.

[Total: 11]



**BLANK PAGE** 

**4** A student investigates the speed of a small trolley moving down a sloping ramp.

Plan an experiment which will enable her to compare the effect of different angles of slope on the average speed of the trolley between points on the ramp.

Average speed can be calculated from the equation:

average speed = 
$$\frac{\text{distance}}{\text{time}}$$

The apparatus available includes:

- a long ramp with a support that enables it to be set at different angles of slope
- a small trolley.

In your plan:

- list any additional apparatus needed
- explain briefly how to do the experiment, including how to take the measurements so that the average speed can be determined
- · suggest a possible source of inaccuracy even if the method is carried out carefully
- state the key variables to keep constant
- draw a table, or tables, with column headings, to show how to display the readings (you are not required to enter any readings in the table)
- explain how to use the readings to reach a conclusion.

You may draw a diagram if it helps to explain your plan.

* 000080000015 *  15
[7]

\* 0000800000016 \*

16

## **BLANK PAGE**

Permission to reproduce items where third-party owned material protected by copyright is included has been sought and cleared where possible. Every reasonable effort has been made by the publisher (UCLES) to trace copyright holders, but if any items requiring clearance have unwittingly been included, the publisher will be pleased to make amends at the earliest possible opportunity.

To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced online in the Cambridge Assessment International Education Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download at www.cambridgeinternational.org after the live examination series.

Cambridge Assessment International Education is part of Cambridge Assessment. Cambridge Assessment is the brand name of the University of Cambridge Local Examinations Syndicate (UCLES), which is a department of the University of Cambridge.

© UCLES 2024

