

© International Baccalaureate Organization 2026

All rights reserved. No part of this product may be reproduced in any form or by any electronic or mechanical means, including information storage and retrieval systems, without the prior written permission from the IB. Additionally, the license tied with this product prohibits use of any selected files or extracts from this product. Use by third parties, including but not limited to publishers, private teachers, tutoring or study services, preparatory schools, vendors operating curriculum mapping services or teacher resource digital platforms and app developers, whether fee-covered or not, is prohibited and is a criminal offense.

More information on how to request written permission in the form of a license can be obtained from <https://ibo.org/become-an-ib-school/ib-publishing/licensing/applying-for-a-license/>.

© Organisation du Baccalauréat International 2026

Tous droits réservés. Aucune partie de ce produit ne peut être reproduite sous quelque forme ni par quelque moyen que ce soit, électronique ou mécanique, y compris des systèmes de stockage et de récupération d'informations, sans l'autorisation écrite préalable de l'IB. De plus, la licence associée à ce produit interdit toute utilisation de tout fichier ou extrait sélectionné dans ce produit. L'utilisation par des tiers, y compris, sans toutefois s'y limiter, des éditeurs, des professeurs particuliers, des services de tutorat ou d'aide aux études, des établissements de préparation à l'enseignement supérieur, des fournisseurs de services de planification des programmes d'études, des gestionnaires de plateformes pédagogiques en ligne, et des développeurs d'applications, moyennant paiement ou non, est interdite et constitue une infraction pénale.

Pour plus d'informations sur la procédure à suivre pour obtenir une autorisation écrite sous la forme d'une licence, rendez-vous à l'adresse <https://ibo.org/become-an-ib-school/ib-publishing/licensing/applying-for-a-license/>.

© Organización del Bachillerato Internacional, 2026

Todos los derechos reservados. No se podrá reproducir ninguna parte de este producto de ninguna forma ni por ningún medio electrónico o mecánico, incluidos los sistemas de almacenamiento y recuperación de información, sin la previa autorización por escrito del IB. Además, la licencia vinculada a este producto prohíbe el uso de todo archivo o fragmento seleccionado de este producto. El uso por parte de terceros —lo que incluye, a título enunciativo, editoriales, profesores particulares, servicios de apoyo académico o ayuda para el estudio, colegios preparatorios, desarrolladores de aplicaciones y entidades que presten servicios de planificación curricular u ofrezcan recursos para docentes mediante plataformas digitales—, ya sea incluido en tasas o no, está prohibido y constituye un delito.

En este enlace encontrará más información sobre cómo solicitar una autorización por escrito en forma de licencia: <https://ibo.org/become-an-ib-school/ib-publishing/licensing/applying-for-a-license/>.

Computer science

Standard level

Paper 2

4 May 2026

Zone A morning | **Zone B** morning | **Zone C** morning

1 hour

Instructions to students

- Do not open this examination paper until instructed to do so.
- Answer all of the questions from one of the options.
- The maximum mark for this examination paper is **[45 marks]**.

Option	Questions
Option A — Databases	1 – 3
Option B — Modelling and simulation	4 – 6
Option C — Web science	7 – 9
Option D — Object-oriented programming	10 – 12

Blank page

Option A — Databases

1. A software company employs programmers and managers.

- Each programmer works on a single project.
- Each project has multiple programmers.
- Each manager oversees multiple projects.
- Each project has one manager.

(a) Construct an entity-relationship diagram (ERD) that shows the relationships between programmer, manager and project. [2]

When a programmer changes source code, the changes are automatically written to a database and timestamped.

(b) Outline **one** benefit of using a database to track changes to source code. [2]

(c) Outline the role of timestamps in maintaining data consistency. [2]

Multiple programmers can work on the same source code concurrently (at the same time).

(d) Explain **one** way in which concurrency can be managed in the database when two programmers update the same line of code at the same time. [5]

(e) When data corruption occurs, databases need to be restored to a consistent state.

(i) Outline what is meant by a consistent database state. [2]

(ii) Describe **one** recovery method that can be used to restore a database. [3]

(Option A continues on the following page)

(Option A continued)

2. A software company has a manager who oversees several projects. Each project is developed for a specific client.

A record of a project is placed in a PROJECT table:

PROJECT (ManagerID, ClientID, ProjectID, ProjectName, StartDate, EndDate, Priority)

- (a) Suggest a primary key for the PROJECT table. [2]

The Priority field stores only two pieces of data: High or Low.

- (b) Outline an appropriate data type for the Priority field. [2]

The PROJECT table is shown in **Figure 1**, the MANAGER table is shown in **Figure 2**, and the CLIENT table is shown in **Figure 3**.

Figure 1: The PROJECT table

ManagerID	ClientID	ProjectID	ProjectName	StartDate	EndDate	Priority
M123	C001	1	AI bot	2024-01-01	2025-12-31	High
M456	C002	2	Website	2024-02-01	2025-08-31	Low
M123	C003	3	Data analysis	2024-03-01	2025-11-30	Low
M789	C004	4	Cybersecurity	2024-04-01	2025-09-30	High

Figure 2: The MANAGER table

ManagerID	ManagerName	PhoneNumber	EmploymentDate
M123	Sehee Choi	0107930361	2023-04-12
M456	Errol Blake	0105940577	2022-01-29
M789	Faye Yang	0109839399	2023-12-18

(Option A continues on the following page)

(Option A, question 2 continued)

Figure 3: The CLIENT table

ClientID	ClientName	ContactNumber	Industry
C001	Tech Innovators	0123456789	Technology
C002	Web Solutions	0987654321	Web development
C003	Data Insights	0234567890	Data analysis
C004	Secure Corp	0345678901	Cybersecurity

- (c) Construct a query to find ClientName and ContactNumber for projects managed by Sehee Choi that are High priority.

[5]

The database table (**Figure 4**) includes the professional development details of programmers.

Figure 4: The database table showing the professional development details of programmers

ID	Programmer	Level	Qualification	Company	CourseDate	Complete	Cost
1	Jana Jain	Senior	Oracle-certified, Java	CyberSafe	2024-01-29	Yes	2000
2	Kev McClure	Senior	Azure AI engineer	UniCode	2024-02-05	Yes	3000
3	Colin Sinclair	Junior	Certified data scientist	DataCamp	2024-03-11	No	2500
4	Dave Lees	Junior	CISSP certification	CyberSafe	2024-04-21	Yes	2200
1	Jana Jain	Senior	Azure AI engineer	UniCode	2024-05-28	No	3200
2	Kev McClure	Senior	Oracle-certified, Java	DataCamp	2024-06-01	No	2000

- (d) Construct the database in 3rd normal form (3NF) for the entities shown in **Figure 4**.

You should use the following notation:

TABLE (Key, Field1, Field2,...)

[5]

(Option A continues on page 7)

Blank page

(Option A continued)

3. A company is developing a database to track employees working remotely. This database is planned using conceptual schema and a data dictionary.

- (a) Outline the role of conceptual schema. [2]
- (b) Outline the purpose of a data dictionary. [2]
- (c) Describe the role of a data definition language in implementing a data model. [3]

Remote working requires increased levels of data security.

- (d) List **three** tasks that a database administrator carries out to ensure data security. [3]

The company is planning to allow external regulators to view the database.

- (e) Explain the benefits of allowing external regulators to view the database. [5]

End of Option A

Option B — Modelling and simulation

4. The spreadsheet extract in **Figure 5** shows the scores for five students at City Walk School for two semesters (Sem 1 and Sem 2).

Figure 5: Spreadsheet extract showing five students' scores for two semesters

	A	B	C	D	E
1	Student name	Sem 1	Sem 2	Final %	Student grade
2	Elaine Anaya Khan	20	30	50.0	
3	Angel Chanchikova	32	54	87.5	
4	Isabella	26	45	72.5	
5	Sarah Naveneethan	32	38	67.5	
6	Scott Abou Khalil	16	24	40.0	

- Sem 1 scores (column B) are out of 40.
- Sem 2 scores (column C) are out of 60.
- Final (column D) combines the scores for both semesters, weighted 25 % for semester 1 (Sem 1) and 75 % for semester 2 (Sem 2).

- (a) (i) State Elaine Anaya Khan's percentage for semester 1. [1]
- (ii) Construct the formula to calculate the percentage for cell D2. [2]

City Walk School reports students' grades from lowest to highest (E to A), inclusively:

- A score between 35 and 46, inclusive, returns an E grade.
- A score between 47 and 59, inclusive, returns a D grade.
- A score between 60 and 69, inclusive, returns a C grade.
- A score between 69 and 84, inclusive, returns a B grade.
- A score of 85 or more returns an A grade.

(Option B continues on the following page)

(Option B, question 4 continued)

The data for these scores are stored in columns H and I (see **Figure 6**).

Figure 6

	A	...	D	E	...	H	I
1	Student name		Final	Student grade		School score	Grade
2	Elaine Anaya Khan		50.0			35	E
3	Angel Chanchikova		87.5			47	D
4	Isabella		72.5			60	C
5	Sarah Naveneethan		67.5			70	B
6	Scott Abou Khalil		40.0			85	A

- (b) Construct a formula to automatically add Elaine Anaya Khan's grade (shown in column I) to cell E2.

[3]

The formula `=FIND(A2, " ")` has been added to cell F2 and replicated down the rest of the column (see **Figure 7**).

Figure 7

	A	...	F
1	Student name		FIND
2	Elaine Anaya Khan		7
3	Angel Chanchikova		6
4	Isabella		#VALUE!
5	Sarah Naveneethan		6
6	Scott Abou Khalil		6

Row 4 produces an error.

- (c) Outline why cell F4 produced an error.

[2]

(Option B continues on page 11)

Blank page

(Option B, question 4 continued)

The function `=ISNUMBER(value)` returns `TRUE` if the value is a number and `FALSE` if the value is not a number.

For example, the value in F2 should be 7 because 7 is an integer. The value in F4 should be `FALSE` because `#VALUE!` is not an integer.

(d) Construct a formula for cell F4 as described.

[3]

To fix the error in row 4, Isabella's last name has been added. Two additional columns have been inserted: Last name and First name (see **Figure 8**).

Figure 8

	A	B	C	D
1	Student name	Last name	First name	Sem 1
2	Elaine Anaya Khan	Khan	Elaine	20
3	Angel Chanchikova	Chanchikova	Angel	32
4	Isabella Hodroge	Hodroge	Isabella	26
5	Sarah Naveneethan	Naveneethan	Sarah	32
6	Scott Abou Khalil	Khalil	Scott	16

The first name in cell C2 has been extracted from the full name in cell A2 using the `MID` function and `FIND` function:

`=MID(A2,1,FIND(" ",A2)-1)`

In column B, last names have been extracted from the student names in column A. Any middle name has been ignored.

(e) Explain how a last name could be extracted while ignoring a middle name.

[4]

(Option B continues on the following page)

(Option B continued)

5. Schools in the region are required to upload student names and their scores for each subject to the portal of the Ministry of Education (a governmental organization that oversees standards for examination scores).

City Walk School's grade boundaries* are lower than the Ministry of Education's grade boundaries, as shown in **Figure 9**.

Figure 9: Grade boundaries for City Walk School and the Ministry of Education

	H	I	J	K
1	School score	Grade	Ministry score	Grade
2	35–46	E	40–51	E
3	47–59	D	52–65	D
4	60–69	C	66–75	C
5	70–84	B	76–90	B
6	85–100	A	91–100	A

Consider the formula:

$$KS = \left(\frac{SSS - MinSS}{MaxSS - MinSS} \right) \times (91 - 40) + 40$$

where:

- SSS is the student's school score.
- *MinSS* is 35, the minimum score in the school's data range.
- *MaxSS* is 85, the minimum score for an A grade in the school's data range.
- 40 is the minimum score in the Ministry of Education's data range.
- 91 is the minimum score for an A grade in the Ministry of Education's data range.

This formula is used to scale data from one range (e.g. school score: 35–85) to a different range (Ministry score: 40–91).

- (a) Calculate *KS* to one decimal place, where *SSS* = 60.

You must show your working.

[2]

* grade boundaries: the range of marks required to achieve a specific grade

(Option B continues on the following page)

(Option B, question 5 continued)

The spreadsheet extract shown in **Figure 9** has been imported into a program.

- An array, STUDENTS, stores student's last names.
- An array, SCORES, stores student's school scores rounded to the nearest integer.
- An array, MINISTRY, consists of five integers of 0.

```
STUDENTS = [Khan, Chanchikova, Hodroge, Naveneethan, Khalil]
SCORES = [50, 88, 73, 68, 40]
MINISTRY = [0, 0, 0, 0, 0]
```

A pseudocode algorithm should take each value in the SCORES array and apply the formula to calculate the Ministry score. The result of this calculation should be rounded to the nearest integer and stored in the MINISTRY array.

- (b) Construct an algorithm in pseudocode as described. [3]

When schools upload student names and scores, the portal only allows integers between 40 and 100 to be entered. The Ministry of Education runs several automated checks on the data.

- (c) Describe **one** other automated check the Ministry of Education might use to ensure the data is accurate. [3]

For a student to achieve a grade A, they must score between 91 and 100.

A pseudocode algorithm should count the number of grade A students and store the result as a percentage of the total number of students.

- (d) Construct an algorithm in pseudocode as described. [4]

(Option B continues on page 15)

Blank page

(Option B continued)

6. The Ministry of Education is developing a real-time simulation model to monitor and analyse the impact of student attendance on academic performance across all schools in the region.

- (a) Outline what is meant by real-time simulation. [2]

Student attendance rate is a variable used in the simulation.

- (b) Identify **three** other variables that would be required to model this simulation effectively. [3]


- (c) Outline **two** categories of hardware needed for this simulation. [4]

The Ministry of Education decided to use City Walk School as a test case to assess the simulation model's accuracy in predicting student scores based on attendance.

- (d) Discuss **one** factor that could be used to judge the effectiveness of this test case for assessing the accuracy of the simulation model. [5]

After completing the test case, the Ministry of Education applied the simulation to all schools in the region. A heat map visualization was used to show the relationship between absences and grades (see **Figure 10**).

Figure 10: Heat map visualization showing the relationship between absences and grades in schools in the region

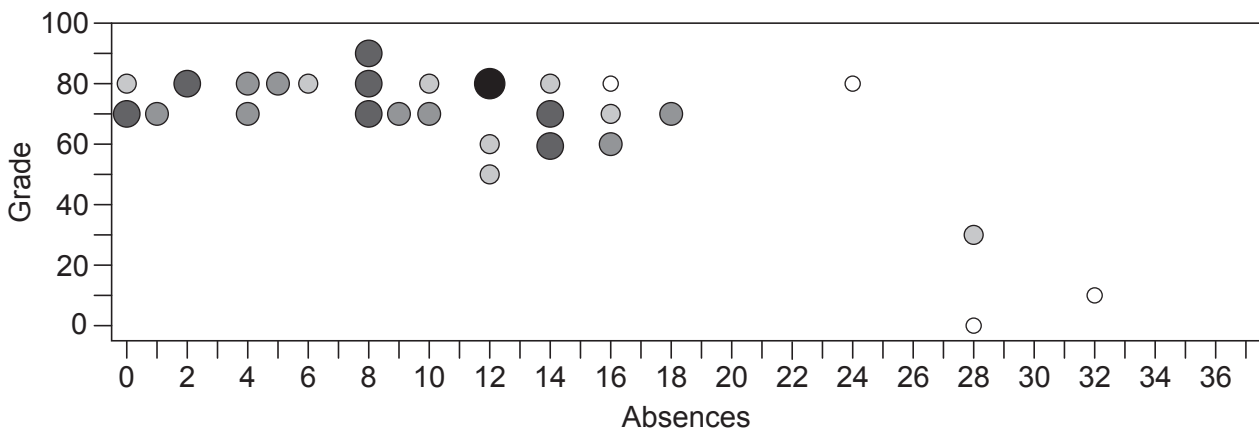


- (e) Outline **two** factors that would affect the memory needs of a 2D visualization such as the heat map shown in **Figure 10**. [4]

End of Option B

Option C — Web science

7. Callum opens a web browser and enters the universal resource locator (URL) of the International Baccalaureate Organization (see **Figure 11**).

Figure 11: Web browser showing the URL of the International Baccalaureate Organization

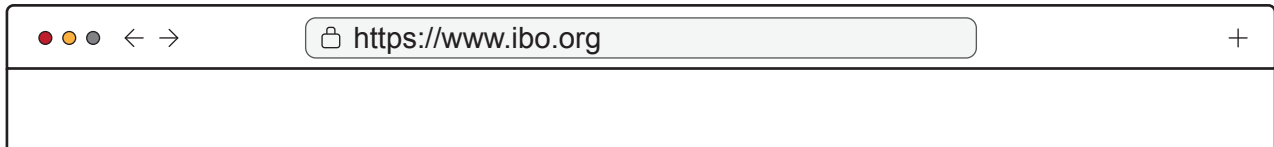

- (a) State **two** characteristics of a URL. [2]
- (b) Outline **two** functions of a web browser. [2]
- (c) Hypertext transfer protocol secure (HTTPS) is an example of a protocol. Explain why protocols are important. [3]
- (d) Identify **two** characteristics of extensible mark-up language (XML). [2]

A website contains a page that lists the students in a class. The page uses two files to develop the list as shown.

Class.xml

```
<?xml-stylesheet type="text/xsl" href="class_style.xsl"?>
<class>
  <student>
    <firstname>John</firstname>
    <surname>Doe</surname>
    <classname>Mathematics</classname>
  </student>
  <student>
    <firstname>Jane</firstname>
    <surname>Smith</surname>
    <classname>Physics</classname>
  </student>
  <student>
    ...
  </class>
```

(Option C continues on the following page)

(Option C, question 7 continued)

Class_style.xsl

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/
Transform">
<xsl:template match="/">
  <html>
    <body>
      <h1>Class Members</h1>
      <table>
        <tr>
          <th>First Name</th>
          <th>Surname</th>
          <th>Class</th>
        </tr>
        <xsl:for-each select="class/student">
          <tr>
            <td><xsl:value-of select="firstname"/></td>
            <td><xsl:value-of select="surname"/></td>
            <td><xsl:value-of select="classname"/></td>
          </tr>
        </xsl:for-each>
      </table>
    </body>
  </html>
</xsl:template>
</xsl:stylesheet>
```

(e) With reference to Class.xml and Class_style.xsl, describe how a page connects to the underlying data source. [2]

(f) Identify **three** characteristics of transmission control protocol (TCP). [3]

8. It is estimated that the deep web is 500 times larger than the surface web.

(a) Outline **one** difference between the deep web and the surface web. [2]

(b) Define the term *web crawler*. [1]

(c) Outline the web crawling process. [3]

(d) Describe **two** advantages of parallel web crawling. [4]

Developers attempt to have their site rank higher in the search engine result.

(e) Evaluate **two** white hat techniques that may be used in search engine optimization. [5]

(Option C continues on page 19)

Blank page

(Option C continued)

9. (a) Distinguish between ubiquitous computing and mobile computing. [4]

Violet is a photographer who has profiles on multiple social media platforms.

The social media platform that Violet uses is a community of independent and personal sites connected by open standards such as ActivityPub. It is described as a distributed social network.

- (b) Describe how open standards support interoperability. [2]

- (c) Explain how distributed social networks support decentralization of the web. [6]

- (d) Discuss the challenges faced by distributed social networks with reference to intellectual property. [4]

End of Option C

Option D — Object-oriented programming

10. A car rental company has several locations around a country. Each location has many cars that are rented to customers throughout the year. The company makes use of object-oriented programming (OOP) to manage the rentals.

The Rental class is shown.

```
public class Rental
{
    private int customerID;
    private boolean priority;
    private int carID;
    private double costPerDay;
    private RentDate startDate;
    private RentDate endDate;

    public Rental(int customerID, boolean priority, int carID, double
costPerDay, RentDate startDate, RentDate endDate)
    {
        this.customerID = customerID;
        this.priority = priority;
        this.carID = carID;
        this.costPerDay = costPerDay;
        this.startDate = startDate;
        this.endDate = endDate;
    }

    public Rental (int customerID, int carID, double costPerDay,
RentDate startDate, RentDate endDate)
    {
        this.customerID = customerID;
        this.priority = false;
        this.carID = carID;
        this.costPerDay = costPerDay;
        this.startDate = startDate;
        this.endDate = endDate;
    }

    public int getCustomerID() { return customerID; }
    public boolean getPriority() { return priority; }
    public int getCarID() { return carID; }
    public double getCostPerDay() { return costPerDay; }
    public RentDate getStartDate() { return startDate; }
    public RentDate getEndDate() { return endDate; }

    public int getDays()
    {
        // implementation not shown
        // returns the number of days between the start date
        // and the end date of the rental
    }
}
```

(Option D continues on the following page)

(Option D, question 10 continued)

```
public int compareTo(RentDate thisDate)
{
    // implementation not shown
    // returns -1 if this date is earlier
    // returns 0 if the dates are the same
    // returns 1 if this date is later
}

public double getCost()
{
    // code missing
}

public String toString()
{
    returnCustomer ID" + customerID + ", Priority Status: " +
priority + ", Car Rented: " + carID + ", cost per day: " + costPerDay;
}
}
```

Each time a car is rented, an instance of the `Rental` class is created.

- (a) Describe, using the `Rental` class as an example, the difference between a class and an instance of a class. [3]

The `Rental` class has two constructor methods with different parameters.

- (b) (i) Outline why having multiple constructors in the `Rental` class is not a problem when creating a new `Rental` object. [3]
- (ii) State the object-oriented programming (OOP) concept that allows two methods in the same class to share the same name but have different parameters. [1]

The `Rental` class makes use of a class, `RentDate`, to store dates.

- (c) Outline **one** benefit of creating the `RentDate` class to store the dates of car rentals. [2]
- (d) Outline the purpose of the `toString()` method in the `Rental` class. [2]

The purpose of the `getCost()` method is to return the total cost of a car rental. The total cost of the rental is the number of days multiplied by the cost per day.

- (e) Construct the code for the `getCost()` method. [4]

(Option D continues on the following page)

(Option D continued)

11. The `RentalShop` class stores information about the shop (location) to which the rental cars belong.

The `RentalShop` class is shown.

```
public class RentalShop {

    private String location;
    private Rental theRentals [];
    private int noOfRentals;

    public RentalShop(String location) {
        this.location = location;
        this.noOfRentals = 0;
        this.theRentals = new Rental[500];
    }
    public String getLocation()      { return location; }
    public Rental getRental(int x)   { return theRentals[x]; }
    public int getNoOfRentals()      { return noOfRentals; }

    protected void addRental(Rental newRental) {
        theRentals[noOfRentals] = newRental;
        noOfRentals = noOfRentals + 1;
    }

    protected Rental [] getTodaysRentals(RentDate today){
        // code missing
    }
}
```

The car rental company would like to open a new shop (location) in Beach Side.

- (a) Construct the code required to create this instance of the `RentalShop` class. [3]
- (b) Describe the use of the modifier `protected`, with reference to methods in the `RentalShop` class. [2]

At the start of each day, the shop needs to produce a listing of all the cars that are being rented out that day.

- (c) Construct the method `getTodaysRentals(RentDate today)`, which will return an array of all the rentals starting on that day.

You can use any previously constructed methods. [6]

The car rental company would like to store information about customers in a separate class.

- (d) Outline **two** changes that would need to be made to the existing classes to accommodate this. [4]

(Option D continues on the following page)

(Option D continued)

12. The full solution is being tested using the following code:

```
RentalShop[] shops = new RentalShop[3];

shops[0] = new RentalShop("Silverlake");
shops[1] = new RentalShop("Fjord View");
shops[2] = new RentalShop("Sea View");

shops[0].addRental(new Rental(2920393,true, 2934, 54.0, new
RentDate(2026, 2, 12), new RentDate(2026, 2, 22)));

shops[0].addRental(new Rental(2929202, 2944, 64.0, new
RentDate(2026, 2, 14), new RentDate(2026, 2, 23)));

shops[2].addRental(new Rental(2920393,true, 334, 52.0, new
RentDate(2026, 2, 12), new RentDate(2026, 4, 20)));

shops[2].addRental(new Rental(2910222,true, 5645, 65.0, new
RentDate(2026, 2, 13), new RentDate(2026, 4, 20)));
```

(a) State the outcome from the following code:

- (i) `IBIO.output(shops[1].getLocation());` [1]
- (ii) `IBIO.output(shops[0].getRental(0).getCustomerID());` [1]
- (iii) `IBIO.output(shops[2].getRental(1).getEndDate());` [1]

A method, `getTotalIncome()`, is needed to find the total costs of all rentals from all cars in all shops.

(b) Outline **one** ethical issue programmers need consider when developing code for financial transactions. [2]

(c) Construct the code for the method `getTotalIncome()`.

You can use any previously constructed methods. [5]

The `Rental` class is dependent on the `RentDate` class.

(d) Explain **one** reason why the programmers would want to reduce dependencies. [3]

The programmers have worked in a team to develop this solution.

(e) Describe **one** advantage of working as a team. [2]

End of Option D

Disclaimer:

Content used in IB assessments is often taken from authentic, third-party sources. The views expressed within them belong to their individual authors and/or publishers and do not necessarily reflect the views of the IB. Sometimes fictitious companies, products or individuals are included in assessments; any similarities with actual entities are purely coincidental. Any trademarks™ or registered® trademarks included are used for illustrative purposes only, and use does not imply any affiliation with or endorsement by the International Baccalaureate.

References:

Figure 10 Etemadpour, R., Zhu, Y., Zhao, Q., Hu, Y., Chen, B., Sharier, M. A., Zheng, S. and Paiva, J. G. S., 2020. Role of absence in academic success: an analysis using visualization tools. *Smart Learning Environments*, [e-journal] 7(2). Available at: <https://slejournal.springeropen.com/articles/10.1186/s40561-019-0112-3> [Accessed 18 June 2025]. Source adapted.